

Mounting: recessed into ceiling

Housing: die-cast aluminum

Diffuser: glass/PC lens

Trim Colors:

01-white matte

13-grey matte

16-polished chrome

18-satin chrome

* other colors are available on request

LED: COB

CRI: >80

Color temperature, K:

CT27-2700k

CT30-3000k

CT40-4000k

Notes: * Lm given in data is based on 3000k

* other CCT is available on request

AC Volt: 220-240V

Frequency: 50/60Hz

LED driver options:

ND - non-dimmable

PH - phase dimmable

010V - 0-10V dimmable




DALI - compatible

Areas of use:

indoors:

hotels, residential,

lift lobbies, corridors

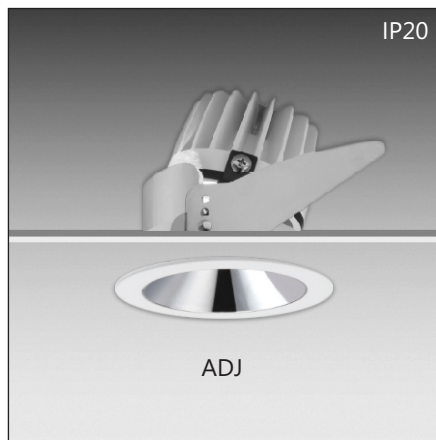

Ref Code	Watt	Lm	H
03.10.127.01.06	6W	400	78
03.10.127.02.08	8W	500	78
03.10.127.03.10	10W	600	78
03.10.128.01.15	15W	900	98

Beam Angle-Code:



24° -BA24

36° -BA36

Ordering Guide:

03.10.127.01.06+SQ+00+CT30+BA24+010V

(item code+trim shape+trim color+LED CCT+beam+0-10v dimmable driver)



Ref Code	Watt	Lm	H
03.10.129.01.06	6W	400	78
03.10.129.02.08	8W	500	78
03.10.129.03.10	10W	600	78
03.10.130.01.15	15W	900	98

Beam Angle-Code:

24° -BA24

36° -BA36

Ordering Guide:

03.10.129.01.06+SQ+00+CT30+BA24+010V

(item code+trim shape+trim color+LED CCT+beam+0-10v dimmable driver)

