

**Mounting:** recessed into ceiling

**Housing:** aluminum alloy

**Reflector:** polycarbonate

**Trim color options:**

01-white matte

11-black matte

13-grey matte

**Note:** \* Standard color of internal reflector is black. Other reflector's colors are available on request.

**LED:** Osram/SMD

**CRI:** Ra>90

**CCT:**

CT27-2700k

CT30-3000k

CT40-4000k

CT50-5000k

CT60-6000k

**LED driver:** remote

**Volt AC:** 220-240V

**LED driver options:**

ND - non-dimmable

PH - phase dimmable

010V - 0-10V dimmable

DALI - compatible

**Note:** \*Lm given in data is based on 3000k

**Areas of use:**



indoors:

public/private/residential

show-rooms

corridors

offices

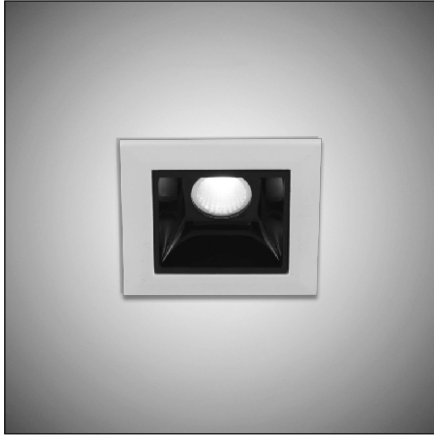



Ref Code	Watt	mA	Lm(±)
16.05.016.01.02	1x2W	700	160

**Beam Angle-Code:**

15°-BA15

30°-BA30

45°-BA45

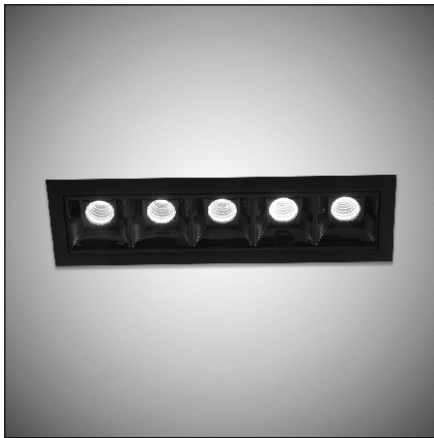


Ref Code	Watt	mA	Lm(±)
16.05.017.01.10	5x2W	700	800

**Beam Angle-Code:**

15°-BA15

30°-BA30

45°-BA45




Ref Code	Watt	mA	Lm(±)
16.05.018.01.20	10x2W	700	1600

**Beam Angle-Code:**

15°-BA15

30°-BA30

45°-BA45



Ref Code	Watt	mA	Lm(±)
16.05.019.01.30	15x2W	700	2400

**Beam Angle-Code:**

15°-BA15

30°-BA30

45°-BA45